


The Powershell Book Generator

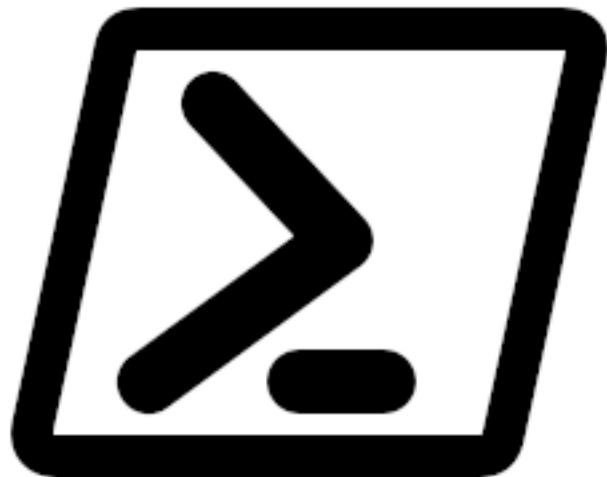

PowerShell with AppVServer

The PowerShell Book Generator - Andreas Nick 2019

<http://www.andreasnick.com>

<http://www.software-virtualisierung.de>

Table Of Contents

Add-AppvServerConnectionGroupPackage.....	3
Get-AppvServerConnectionGroup.....	8
Get-AppvServerPackage.....	10
Get-AppvServerPackageDeploymentConfiguration.....	12
Get-AppvServerPackageUserConfiguration.....	14
Grant-AppvServerConnectionGroup.....	17
Grant-AppvServerPackage.....	20
Import-AppvServerPackage.....	23
New-AppvServerConnectionGroup.....	25
Publish-AppvServerConnectionGroup.....	27
Publish-AppvServerPackage.....	30
Remove-AppvServerConnectionGroup.....	33
Remove-AppvServerConnectionGroupPackage.....	36
Remove-AppvServerPackage.....	40
Set-AppvServerConnectionGroup.....	43
Set-AppvServerConnectionGroupPackage.....	46
Set-AppvServerPackage.....	51
Unpublish-AppvServerConnectionGroup.....	54
Unpublish-AppvServerPackage.....	57
Update-AppvServerConnectionGroup.....	60

Cmdlet: Add-AppvServerConnectionGroupPackage

Synops

```
Add-AppvServerConnectionGroupPackage [-AppvServerConnectionGroup]
<SerializableConnectionGroup> [[-AppvServerPackage] <PackageVersion>] [-
PackageName <string>] [-PackageVersion <string>] [-PackageID <guid>] [-
PackageVersionID <guid>] [-Optional] [-UseAnyPackageVersion] [-Order <int>] [-WhatIf]
[-Confirm] [<CommonParameters>]
```

```
Add-AppvServerConnectionGroupPackage [-ConnectionGroupName] <string> [[-
ConnectionGroupVersion] <int>] [[-AppvServerPackage] <PackageVersion>] [-
PackageName <string>] [-PackageVersion <string>] [-PackageID <guid>] [-
PackageVersionID <guid>] [-Optional] [-UseAnyPackageVersion] [-Order <int>] [-WhatIf]
[-Confirm] [<CommonParameters>]
```

```
Add-AppvServerConnectionGroupPackage [-ConnectionGroupID] <guid> [[-
ConnectionGroupVersionID] <guid>] [[-AppvServerPackage] <PackageVersion>] [-
PackageName <string>] [-PackageVersion <string>] [-PackageID <guid>] [-
PackageVersionID <guid>] [-Optional] [-UseAnyPackageVersion] [-Order <int>] [-WhatIf]
[-Confirm] [<CommonParameters>]
```

Syntax

```
Add-AppvServerConnectionGroupPackage [-AppvServerConnectionGroup]
<SerializableConnectionGroup> [[-AppvServerPackage]
<PackageVersion>]
    [-PackageName <string>] [-PackageVersion <string>] [-
PackageID <guid>] [-PackageVersionID <guid>] [-Optional] [-
UseAnyPackageVersion] [-Order
    <int>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Add-AppvServerConnectionGroupPackage [-ConnectionGroupName]
<string> [[-ConnectionGroupVersion] <int>] [[-AppvServerPackage]
<PackageVersion>]
    [-PackageName <string>] [-PackageVersion <string>] [-
PackageID <guid>] [-PackageVersionID <guid>] [-Optional] [-
UseAnyPackageVersion] [-Order
    <int>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Add-AppvServerConnectionGroupPackage [-ConnectionGroupID] <guid>
[ [-ConnectionGroupVersionID] <guid> ] [[ -AppvServerPackage]
<PackageVersion> ]
    [ -PackageName <string> ] [-PackageVersion <string>] [-
    PackageID <guid>] [-PackageVersionID <guid>] [-Optional] [-
    UseAnyPackageVersion] [-Order
    <int>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Description

Parameters

Parameter :**AppvServerConnectionGroup**

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :**AppvServerPackage**

Required	false
Position	1
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :**Confirm**

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :**ConnectionGroupID**

Required	true
Position	0

Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :**ConnectionGroupName**

Required	true
Position	0
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :**ConnectionGroupVersion**

Required	false
Position	1
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :**ConnectionGroupVersionID**

Required	false
Position	1
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :**Optional**

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :**Order**

Required	false
Position	Named
Default value	
Accept pipeline input?	false

Accept wildcard characters?	
-----------------------------	--

Parameter :PackageID

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :PackageName

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :PackageVersion

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :PackageVersionID

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :UseAnyPackageVersion

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :WhatIf

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Cmdlet: Get-AppvServerConnectionGroup

Synops

```
Get-AppvServerConnectionGroup [[-Name] <string>] [[-Version] <int>]  
[<CommonParameters>]
```

```
Get-AppvServerConnectionGroup [-GroupID] <guid> [[-VersionID] <guid>]  
[<CommonParameters>]
```

Syntax

```
Get-AppvServerConnectionGroup [[-Name] <string>] [[-Version] <int>]  
[<CommonParameters>]
```

```
Get-AppvServerConnectionGroup [-GroupID] <guid> [[-VersionID] <guid>]  
[<CommonParameters>]
```

Description

Parameters

Parameter :**GroupID**

Required	true
Position	0
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :**Name**

Required	false
Position	0
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Version

Required	false
Position	1
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :VersionID

Required	false
Position	1
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Cmdlet: Get-AppvServerPackage

Synops

```
Get-AppvServerPackage [[-Name] <string>] [[-Version] <string>]  
[<CommonParameters>]
```

```
Get-AppvServerPackage [-PackageID] <guid> [[-VersionID] <guid>]  
[<CommonParameters>]
```

Syntax

```
Get-AppvServerPackage [[ -Name ] <string>] [[ -Version ] <string>]  
[ <CommonParameters> ]
```

```
Get-AppvServerPackage [-PackageID] <guid> [[-VersionID] <guid>]  
[ <CommonParameters> ]
```

Description

Parameters

Parameter :Name

Required	false
Position	0
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :PackageID

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :Version

Required	false
Position	1
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :VersionID

Required	false
Position	1
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Cmdlet: Get-AppvServerPackageDeploymentConfiguration

Synops

```
Get-AppvServerPackageDeploymentConfiguration [-Name] <string> [[-Version] <string>]  
[<CommonParameters>]
```

```
Get-AppvServerPackageDeploymentConfiguration [-AppvServerPackage]  
<PackageVersion> [<CommonParameters>]
```

```
Get-AppvServerPackageDeploymentConfiguration [-PackageID] <guid> [[-VersionID]  
<guid>] [<CommonParameters>]
```

Syntax

```
Get-AppvServerPackageDeploymentConfiguration [-Name] <string> [[-  
Version] <string>] [<CommonParameters>]
```

```
Get-AppvServerPackageDeploymentConfiguration [-AppvServerPackage]  
<PackageVersion> [<CommonParameters>]
```

```
Get-AppvServerPackageDeploymentConfiguration [-PackageID] <guid>  
[[-VersionID] <guid>] [<CommonParameters>]
```

Description

Parameters

Parameter :**AppvServerPackage**

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :Name

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :PackageID

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :Version

Required	false
Position	1
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :VersionID

Required	false
Position	1
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Cmdlet: Get-AppvServerPackageUserConfiguration

Synops

```
Get-AppvServerPackageUserConfiguration [-Name] <string> -Group <string>  
[<CommonParameters>]
```

```
Get-AppvServerPackageUserConfiguration [-AppvServerPackage] <PackageVersion> -  
Group <string> [<CommonParameters>]
```

```
Get-AppvServerPackageUserConfiguration [-PackageID] <guid> [[-VersionID] <guid>] -  
Group <string> [<CommonParameters>]
```

```
Get-AppvServerPackageUserConfiguration [[-Version] <string>] -Group <string>  
[<CommonParameters>]
```

Syntax

```
Get-AppvServerPackageUserConfiguration [-Name] <string> -Group  
<string> [<CommonParameters>]
```

```
Get-AppvServerPackageUserConfiguration [-AppvServerPackage]  
<PackageVersion> -Group <string> [<CommonParameters>]
```

```
Get-AppvServerPackageUserConfiguration [-PackageID] <guid> [[-  
VersionID] <guid>] -Group <string> [<CommonParameters>]
```

```
Get-AppvServerPackageUserConfiguration [[-Version] <string>] -  
Group <string> [<CommonParameters>]
```

Description

Parameters

Parameter :**AppvServerPackage**

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :Group

Required	true
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Name

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :PackageID

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :Version

Required	false
Position	1
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :VersionID

Required	false
Position	1
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Cmdlet: Grant-AppvServerConnectionGroup

Synops

```
Grant-AppvServerConnectionGroup [-AppvServerConnectionGroup]  
<SerializableConnectionGroup> [-Groups] <string[]> [-WhatIf] [-Confirm]  
[<CommonParameters>]
```

```
Grant-AppvServerConnectionGroup [-Name] <string> [[-Version] <int>] [-WhatIf] [-  
Confirm] [<CommonParameters>]
```

```
Grant-AppvServerConnectionGroup [-GroupID] <guid> [[-VersionID] <guid>] [-WhatIf] [-  
Confirm] [<CommonParameters>]
```

Syntax

```
Grant-AppvServerConnectionGroup [-AppvServerConnectionGroup]  
<SerializableConnectionGroup> [-Groups] <string[]> [-WhatIf] [-  
Confirm]  
[<CommonParameters>]
```

```
Grant-AppvServerConnectionGroup [-Name] <string> [[-Version]  
<int>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Grant-AppvServerConnectionGroup [-GroupID] <guid> [[-VersionID]  
<guid>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Description

Parameters

Parameter :**AppvServerConnectionGroup**

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue)

Accept wildcard characters?	
-----------------------------	--

Parameter :Confirm

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :GroupID

Required	true
Position	0
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Groups

Required	true
Position	1
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Name

Required	true
Position	0
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Version

Required	false
Position	1
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :VersionID

Required	false
Position	1
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :WhatIf

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Cmdlet: Grant-AppvServerPackage

Synops

```
Grant-AppvServerPackage [-AppvServerPackage] <PackageVersion> [-Groups]
<string[]> [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Grant-AppvServerPackage [-PackageID] <guid> [[-VersionID] <guid>] [-Groups]
<string[]> [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Grant-AppvServerPackage [-Name] <string> [[-Version] <string>] [-Groups] <string[]> [-
WhatIf] [-Confirm] [<CommonParameters>]
```

Syntax

```
Grant-AppvServerPackage [-AppvServerPackage] <PackageVersion> [-
Groups] <string[]> [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Grant-AppvServerPackage [-PackageID] <guid> [[-VersionID] <guid>]
[-Groups] <string[]> [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Grant-AppvServerPackage [-Name] <string> [[-Version] <string>] [-
Groups] <string[]> [-WhatIf] [-Confirm] [<CommonParameters>]
```

Description

Parameters

Parameter :AppvServerPackage

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :Confirm

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Groups

Required	true
Position	2
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Name

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :PackageID

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :Version

Required	false
Position	1
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :VersionID

Required	false
Position	1
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :**WhatIf**

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Cmdlet: Import-AppvServerPackage

Synops

```
Import-AppvServerPackage [-PackagePath] <string> [-WhatIf] [-Confirm]  
[<CommonParameters>]
```

Syntax

```
Import-AppvServerPackage [-PackagePath] <string> [-WhatIf] [-  
Confirm] [<CommonParameters>]
```

Description

Parameters

Parameter :Confirm

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :PackagePath

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :WhatIf

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Cmdlet: New-AppvServerConnectionGroup

Synops

```
New-AppvServerConnectionGroup -Name <string> [-Priority <uint32>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Syntax

```
New-AppvServerConnectionGroup -Name <string> [-Priority <uint32>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Description

Parameters

Parameter :Confirm

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Name

Required	true
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Priority

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :WhatIf

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Cmdlet: Publish-AppvServerConnectionGroup

Synops

```
Publish-AppvServerConnectionGroup [-AppvServerConnectionGroup]  
<SerializableConnectionGroup> [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Publish-AppvServerConnectionGroup [-Name] <string> [[-Version] <int>] [-WhatIf] [-  
Confirm] [<CommonParameters>]
```

```
Publish-AppvServerConnectionGroup [-GroupID] <guid> [[-VersionID] <guid>] [-WhatIf] [-  
Confirm] [<CommonParameters>]
```

Syntax

```
Publish-AppvServerConnectionGroup [-AppvServerConnectionGroup]  
<SerializableConnectionGroup> [-WhatIf] [-Confirm]  
[<CommonParameters>]
```

```
Publish-AppvServerConnectionGroup [-Name] <string> [[-Version]  
<int>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Publish-AppvServerConnectionGroup [-GroupID] <guid> [[-VersionID]  
<guid>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Description

Parameters

Parameter :**AppvServerConnectionGroup**

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :Confirm

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :GroupID

Required	true
Position	0
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Name

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :Version

Required	false
Position	1
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :VersionID

Required	false
Position	1
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :WhatIf

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Cmdlet: Publish-AppvServerPackage

Synops

```
Publish-AppvServerPackage [[-Name] <string>] [[-Version] <string>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Publish-AppvServerPackage [-AppvServerPackage] <PackageVersion[]> [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Publish-AppvServerPackage [-PackageID] <guid> [[-VersionID] <guid>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Syntax

```
Publish-AppvServerPackage [[-Name] <string>] [[-Version] <string>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Publish-AppvServerPackage [-AppvServerPackage] <PackageVersion[]> [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Publish-AppvServerPackage [-PackageID] <guid> [[-VersionID] <guid>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Description

Parameters

Parameter :AppvServerPackage

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :Confirm

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Name

Required	false
Position	0
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :PackageID

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :Version

Required	false
Position	1
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :VersionID

Required	false
Position	1
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :WhatIf

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Cmdlet: Remove-AppvServerConnectionGroup

Synops

```
Remove-AppvServerConnectionGroup [-Name] <string> [[-Version] <int>] [-Force] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Remove-AppvServerConnectionGroup [-AppvServerConnectionGroup] <SerializableConnectionGroup> [-Force] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Remove-AppvServerConnectionGroup [-GroupID] <guid> [[-VersionID] <guid>] [-Force] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Syntax

```
Remove-AppvServerConnectionGroup [-Name] <string> [[-Version] <int>] [-Force] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Remove-AppvServerConnectionGroup [-AppvServerConnectionGroup] <SerializableConnectionGroup> [-Force] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Remove-AppvServerConnectionGroup [-GroupID] <guid> [[-VersionID] <guid>] [-Force] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Description

Parameters

Parameter :**AppvServerConnectionGroup**

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :Confirm

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Force

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :GroupId

Required	true
Position	0
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Name

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :Version

Required	false
Position	1
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :VersionID

Required	false
Position	1
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :WhatIf

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Cmdlet: Remove-AppvServerConnectionGroupPackage

Synops

```
Remove-AppvServerConnectionGroupPackage [-AppvServerConnectionGroup]
<SerializableConnectionGroup> [[-AppvServerPackage] <PackageVersion>] [-
PackageName <string>] [-PackageVersion <string>] [-PackageID <guid>] [-
PackageVersionID <guid>] [-WhatIf] [-Confirm] [<CommonParameters>]

Remove-AppvServerConnectionGroupPackage [-ConnectionGroupName] <string> [[-
ConnectionGroupVersion] <int>] [[-AppvServerPackage] <PackageVersion>] [-
PackageName <string>] [-PackageVersion <string>] [-PackageID <guid>] [-
PackageVersionID <guid>] [-WhatIf] [-Confirm] [<CommonParameters>]

Remove-AppvServerConnectionGroupPackage [-ConnectionGroupID] <guid> [[-
ConnectionGroupVersionID] <guid>] [[-AppvServerPackage] <PackageVersion>] [-
PackageName <string>] [-PackageVersion <string>] [-PackageID <guid>] [-
PackageVersionID <guid>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Syntax

```
Remove-AppvServerConnectionGroupPackage [-
AppvServerConnectionGroup] <SerializableConnectionGroup> [[-
AppvServerPackage] <PackageVersion>]
[-PackageName <string>] [-PackageVersion <string>] [-
PackageID <guid>] [-PackageVersionID <guid>] [-WhatIf] [-Confirm]
[<CommonParameters>]

Remove-AppvServerConnectionGroupPackage [-ConnectionGroupName]
<string> [[-ConnectionGroupVersion] <int>] [[-AppvServerPackage]
<PackageVersion>]
[-PackageName <string>] [-PackageVersion <string>] [-
PackageID <guid>] [-PackageVersionID <guid>] [-WhatIf] [-Confirm]
[<CommonParameters>]

Remove-AppvServerConnectionGroupPackage [-ConnectionGroupID]
<guid> [[-ConnectionGroupVersionID] <guid>] [[-AppvServerPackage]
<PackageVersion>]
```

```
[ -PackageName <string> ] [-PackageVersion <string>] [-  
PackageID <guid>] [-PackageVersionID <guid>] [-WhatIf] [-Confirm]  
[ <CommonParameters> ]
```

Description

Parameters

Parameter :AppvServerConnectionGroup

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :AppvServerPackage

Required	false
Position	2
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :Confirm

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :ConnectionGroupID

Required	true
Position	0
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :ConnectionGroupName

Required	true
Position	0
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :ConnectionGroupVersion

Required	false
Position	1
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :ConnectionGroupVersionID

Required	false
Position	1
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :PackageID

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :PackageName

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :PackageVersion

Required	false
----------	-------

Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :PackageVersionID

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :WhatIf

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Cmdlet: Remove-AppvServerPackage

Synops

```
Remove-AppvServerPackage [-Name] <string> [[-Version] <string>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Remove-AppvServerPackage [-AppvServerPackage] <PackageVersion[]> [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Remove-AppvServerPackage [-PackageID] <guid> [[-VersionID] <guid>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Syntax

```
Remove-AppvServerPackage [-Name] <string> [[-Version] <string>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Remove-AppvServerPackage [-AppvServerPackage] <PackageVersion[]> [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Remove-AppvServerPackage [-PackageID] <guid> [[-VersionID] <guid>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Description

Parameters

Parameter :AppvServerPackage

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :Confirm

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Name

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :PackageID

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :Version

Required	false
Position	1
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :VersionID

Required	false
Position	1
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :WhatIf

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Cmdlet: Set-AppvServerConnectionGroup

Synops

```
Set-AppvServerConnectionGroup [-Name] <string> [[-Version] <int>] [[-  
AppvServerPackage] <PackageVersion[]>] [-Priority <uint32>] [-Order <int[]>] [-WhatIf] [-  
Confirm] [<CommonParameters>]
```

```
Set-AppvServerConnectionGroup [-AppvServerConnectionGroup]  
<SerializableConnectionGroup> [[-AppvServerPackage] <PackageVersion[]>] [-Priority  
<uint32>] [-Order <int[]>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Set-AppvServerConnectionGroup [-GroupID] <guid> [[-VersionID] <guid>] [[-  
AppvServerPackage] <PackageVersion[]>] [-Priority <uint32>] [-Order <int[]>] [-WhatIf] [-  
Confirm] [<CommonParameters>]
```

Syntax

```
Set-AppvServerConnectionGroup [-Name] <string> [[-Version] <int>]  
[[-AppvServerPackage] <PackageVersion[]>] [-Priority <uint32>] [-  
Order <int[]>]  
[-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Set-AppvServerConnectionGroup [-AppvServerConnectionGroup]  
<SerializableConnectionGroup> [[-AppvServerPackage]  
<PackageVersion[]>] [-Priority  
<uint32>] [-Order <int[]>] [-WhatIf] [-Confirm]  
[<CommonParameters>]
```

```
Set-AppvServerConnectionGroup [-GroupID] <guid> [[-VersionID]  
<guid>] [[-AppvServerPackage] <PackageVersion[]>] [-Priority  
<uint32>] [-Order  
<int[]>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Description

Parameters

Parameter :AppvServerConnectionGroup

Required	true
Position	0
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :AppvServerPackage

Required	false
Position	2
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :Confirm

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :GroupID

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :Name

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :Order

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Priority

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Version

Required	false
Position	1
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :VersionID

Required	false
Position	1
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :WhatIf

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Cmdlet: Set-AppvServerConnectionGroupPackage

Synops

```
Set-AppvServerConnectionGroupPackage [-AppvServerConnectionGroup]
<SerializableConnectionGroup> [[-AppvServerPackage] <PackageVersion>] [-
PackageName <string>] [-PackageVersion <string>] [-PackageID <guid>] [-
PackageVersionID <guid>] [-Optional <bool>] [-UseAnyPackageVersion <bool>] [-Order
<int>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Set-AppvServerConnectionGroupPackage [-ConnectionGroupName] <string> [[-
ConnectionGroupVersion] <int>] [[-AppvServerPackage] <PackageVersion>] [-
PackageName <string>] [-PackageVersion <string>] [-PackageID <guid>] [-
PackageVersionID <guid>] [-Optional <bool>] [-UseAnyPackageVersion <bool>] [-Order
<int>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Set-AppvServerConnectionGroupPackage [-ConnectionGroupID] <guid> [[-
ConnectionGroupVersionID] <guid>] [[-AppvServerPackage] <PackageVersion>] [-
PackageName <string>] [-PackageVersion <string>] [-PackageID <guid>] [-
PackageVersionID <guid>] [-Optional <bool>] [-UseAnyPackageVersion <bool>] [-Order
<int>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Syntax

```
Set-AppvServerConnectionGroupPackage [-AppvServerConnectionGroup]
<SerializableConnectionGroup> [[-AppvServerPackage]
<PackageVersion>]
    [-PackageName <string>] [-PackageVersion <string>] [-
PackageID <guid>] [-PackageVersionID <guid>] [-Optional <bool>]
    [-UseAnyPackageVersion
        <bool>] [-Order <int>] [-WhatIf] [-Confirm]
    [<CommonParameters>]
```

```
Set-AppvServerConnectionGroupPackage [-ConnectionGroupName]
<string> [[-ConnectionGroupVersion] <int>] [[-AppvServerPackage]
<PackageVersion>]
    [-PackageName <string>] [-PackageVersion <string>] [-
PackageID <guid>] [-PackageVersionID <guid>] [-Optional <bool>]
    [-UseAnyPackageVersion
        <bool>] [-Order <int>] [-WhatIf] [-Confirm]
```

```
[ <CommonParameters> ]
```

```
Set-AppvServerConnectionGroupPackage [-ConnectionGroupID] <guid>
[ [-ConnectionGroupVersionID] <guid> ] [[ -AppvServerPackage]
<PackageVersion> ]
    [-PackageName <string>] [-PackageVersion <string>] [-
PackageID <guid>] [-PackageVersionID <guid>] [-Optional <bool>]
[-UseAnyPackageVersion
<bool>] [-Order <int>] [-WhatIf] [-Confirm]
[ <CommonParameters> ]
```

Description

Parameters

Parameter :**AppvServerConnectionGroup**

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :**AppvServerPackage**

Required	false
Position	1
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :**Confirm**

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :ConnectionGroupID

Required	true
Position	0
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :ConnectionGroupName

Required	true
Position	0
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :ConnectionGroupVersion

Required	false
Position	1
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :ConnectionGroupVersionID

Required	false
Position	1
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Optional

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Order

Required	false
----------	-------

Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :**PackageID**

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :**PackageName**

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :**PackageVersion**

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :**PackageVersionID**

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :**UseAnyPackageVersion**

Required	false
Position	Named
Default value	

Accept pipeline input?	false
Accept wildcard characters?	

Parameter :WhatIf

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Cmdlet: Set-AppvServerPackage

Synops

```
Set-AppvServerPackage [-AppvServerPackage] <PackageVersion> [[-Groups] <string[]>]
[-DynamicDeploymentConfigurationPath] <string> [[-DynamicUserConfigurationPath]
<string>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Set-AppvServerPackage [-Name] <string> [[-Version] <string>] [[-DynamicDeploymentConfigurationPath] <string>] [[-DynamicUserConfigurationPath] <string>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Set-AppvServerPackage [-PackageID] <guid> [[-VersionID] <guid>] [[-DynamicDeploymentConfigurationPath] <string>] [[-DynamicUserConfigurationPath] <string>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Syntax

```
Set-AppvServerPackage [-AppvServerPackage] <PackageVersion> [[-Groups] <string[]>] [[-DynamicDeploymentConfigurationPath] <string>]
[-DynamicUserConfigurationPath] <string> [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Set-AppvServerPackage [-Name] <string> [[-Version] <string>] [[-DynamicDeploymentConfigurationPath] <string>] [[-DynamicUserConfigurationPath]
<string>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Set-AppvServerPackage [-PackageID] <guid> [[-VersionID] <guid>] [[-DynamicDeploymentConfigurationPath] <string>] [[-DynamicUserConfigurationPath]
<string>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Description

Parameters

Parameter :AppvServerPackage

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :Confirm

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :DynamicDeploymentConfigurationPath

Required	false
Position	2
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :DynamicUserConfigurationPath

Required	false
Position	3
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Groups

Required	false
Position	1
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Name

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :PackageID

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :Version

Required	false
Position	1
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :VersionID

Required	false
Position	1
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :WhatIf

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Cmdlet: Unpublish-AppvServerConnectionGroup

Synops

```
Unpublish-AppvServerConnectionGroup [-AppvServerConnectionGroup]  
<SerializableConnectionGroup> [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Unpublish-AppvServerConnectionGroup [-Name] <string> [[-Version] <int>] [-WhatIf] [-  
Confirm] [<CommonParameters>]
```

```
Unpublish-AppvServerConnectionGroup [-GroupID] <guid> [[-VersionID] <guid>] [-  
WhatIf] [-Confirm] [<CommonParameters>]
```

Syntax

```
Unpublish-AppvServerConnectionGroup [-AppvServerConnectionGroup]  
<SerializableConnectionGroup> [-WhatIf] [-Confirm]  
[<CommonParameters>]
```

```
Unpublish-AppvServerConnectionGroup [-Name] <string> [[-Version]  
<int>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Unpublish-AppvServerConnectionGroup [-GroupID] <guid> [[-  
VersionID] <guid>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Description

Parameters

Parameter :**AppvServerConnectionGroup**

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :Confirm

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :GroupID

Required	true
Position	0
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Name

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :Version

Required	false
Position	1
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :VersionID

Required	false
Position	1
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :WhatIf

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Cmdlet: Unpublish-AppvServerPackage

Synops

```
Unpublish-AppvServerPackage [[-Name] <string>] [[-Version] <string>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Unpublish-AppvServerPackage [-AppvServerPackage] <PackageVersion[]> [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Unpublish-AppvServerPackage [-PackageID] <guid> [[-VersionID] <guid>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Syntax

```
Unpublish-AppvServerPackage [[-Name] <string>] [[-Version] <string>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Unpublish-AppvServerPackage [-AppvServerPackage] <PackageVersion[]> [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Unpublish-AppvServerPackage [-PackageID] <guid> [[-VersionID] <guid>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Description

Parameters

Parameter :AppvServerPackage

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :Confirm

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :**Name**

Required	false
Position	0
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :**PackageID**

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :**Version**

Required	false
Position	1
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :**VersionID**

Required	false
Position	1
Default value	
Accept pipeline input?	true (ByValue, ByPropertyName)
Accept wildcard characters?	

Parameter :WhatIf

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Cmdlet: Update-AppvServerConnectionGroup

Synops

```
Update-AppvServerConnectionGroup [-AppvServerConnectionGroup]  
<SerializableConnectionGroup> [-WhatIf] [-Confirm] [<CommonParameters>]
```

```
Update-AppvServerConnectionGroup [-Name] <string> [[-Version] <int>] [-WhatIf] [-  
Confirm] [<CommonParameters>]
```

Syntax

```
Update-AppvServerConnectionGroup [-AppvServerConnectionGroup]  
<SerializableConnectionGroup> [-WhatIf] [-Confirm]  
[<CommonParameters>]
```

```
Update-AppvServerConnectionGroup [-Name] <string> [[-Version]  
<int>] [-WhatIf] [-Confirm] [<CommonParameters>]
```

Description

Parameters

Parameter :AppvServerConnectionGroup

Required	true
Position	0
Default value	
Accept pipeline input?	true (ByValue)
Accept wildcard characters?	

Parameter :Confirm

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Name

Required	true
Position	0
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :Version

Required	false
Position	1
Default value	
Accept pipeline input?	false
Accept wildcard characters?	

Parameter :WhatIf

Required	false
Position	Named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	